

Par 1215 IP

User Manual




Guangzhou Mitek Light Co.,LTD

Email: info@miteklight.com

Website: www.miteklight.com

Add: No. 21 Dongfeng Avenue, Automobile Industry Base, Huadu District, Guangzhou

Graphical section

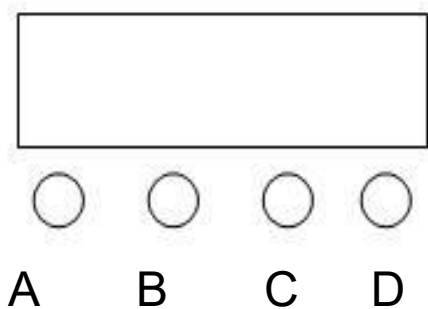

- A. Function key
- B. Add key
- C. Reduce key
- D. Confirm key
- E. LED display window

1) Operation instructions: Pressing function key A will cycle through the menu function effects. The first two digits of the digital tube represent the current function (refer to the function table). The last two digits represent the address code or speed parameter of the function. Press key B or C to modify the parameter value. Press key D to confirm.

2) Check the temperature value inside the machine: Double-click the confirmation key and do not release it.

3) Dial: key dial/RDM dial

LED display window function comparison table, (All functions are selected and then confirmed by pressing the D key)

NO.	display	Functional Description
1	d001	address code, (001—512) B、C Key addition and subtraction address code value
2	CC50	Jump, (00—99) B、C Key to modify the jump speed
3	CP50	Gradient, (00—99) B、C Key to modify the gradient speed
4	dE50	Pulse changes, (00—99) B、C Key to modify pulse speed
5	bEbE	Voice changes
6	R255	Red color selection (000—255) B、C Key to modify color selection
7	G255	Green color selection (000—255) B、C Key to modify color selection
8	B255	Blue color selection (000—255) B、C Key to modify color selection
9	W255	White color selection (000—255) B、C Key to modify color selection

DMX512 eight-channel description (color dimming first, speed first)

NO.	function	illustration
Channel 1	Total dimming	Total dimming, linear dimming, from dark to light
Channel 2	Red dimming	Linear dimming, from dark to light
Channel 3	Green dimming	Linear dimming, from dark to light
Channel 4	Blue dimming	Linear dimming, from dark to light

Channel 5	White dimming	Linear dimming, from dark to light
Channel 6	Total strobe	Total strobe, from slow to fast
Channel 7	Function speed	Function speed, from slow to fast
Channel 8	Feature Selection	0--50 empty 51--100: Jump and run 101--150: Gradient running 151--200: Pulse running 201--255: sound control

Features:

Very simple operation, humanized design, dimming without flickering, jitter, etc. It can be used in photography, photo shooting, TV stations and other occasions with strict lighting requirements.

REMARK

The product has perfect performance and integrity packing.

All users should be strictly comply with the warning and operating instructions as stated.

Or we aren't in charge of any result by misusing.

Any damage resulting by misuse is not within the Company's warranty.

Any fault or problem caused by neglecting the manual is also not in the charge of dealers.

Errors and omissions for every information given in this manual excepted.

All information is subject to change without prior notice.